


SANGLE PLATE AVEC ANNEAU ACIER TYPE BT / BTD

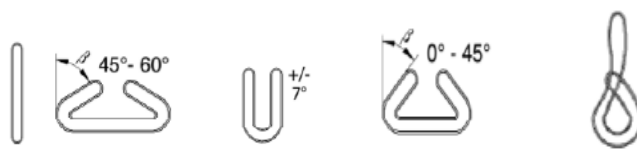

The diagrams show five configurations of slings: a straight sling, a BT (butterfly) configuration with a 45°-60° angle, a U-shaped sling with a +/- 7° angle, a BTD (butterfly double) configuration with a 0°-45° angle, and a loop configuration.

REFERENCE	Largeur (mm)				
BT/BTD 25	25	500	1000	700	400
BT/BTD 48	50	1000	2000	1400	800
BT/BTD 50	50	1500	3000	2100	1200
BT/BTD 65	65	2000	4000	2800	1600
BT/BTD 75	75	3000	6000	4200	2400
BT/BTD 100	100	4000	8000	5600	3200
BT/BTD 150	150	5000	10000	7000	4000
BT/BTD 200	200	6000	12000	8400	4800
BT/BTD 250	250	8000	16000	11200	6400
BT/BTD 300	300	10000	20000	14000	8000

Cette liste n'est pas limitative, toutes les longueurs sont réalisables sur commande

European standard

